


FLOOR

CONTINENTAL SLATE™

COLORBODY™ PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC



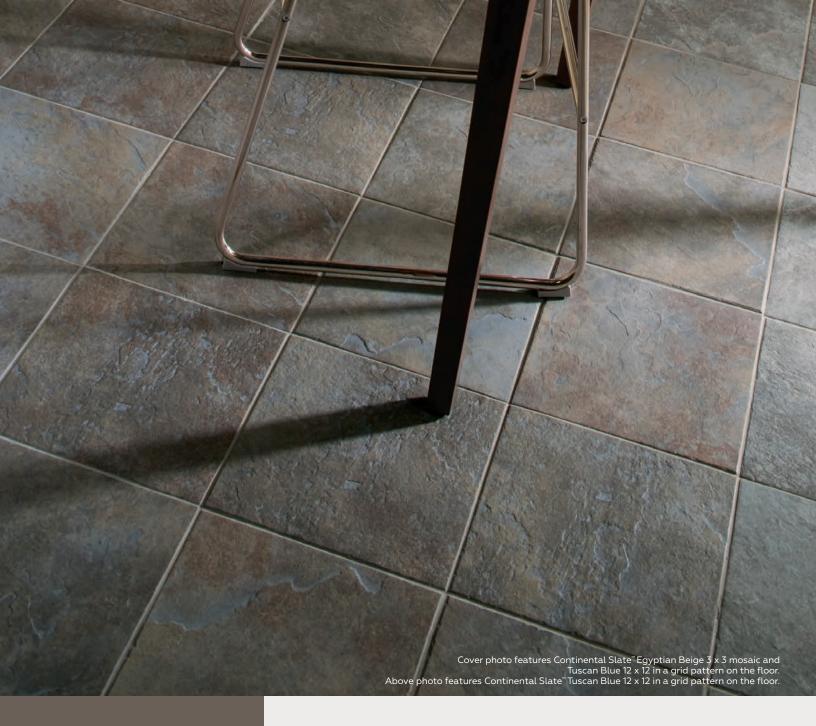

Get Inspired by the Natural Beauty of Slate The intriguing colors and cleft surface of Continental Slate $^{\text{\tiny{IM}}}$ are a near perfect recreation of natural slate. Its inspired tones have a high degree of shade variation, so they complement practically any décor.

EARTHY INSPIRATION

- Design mimics the natural tones, shading and clefting of slate
- Durable option to natural slate

NATURAL DESIGN OPTIONS

- Offered in modular sizes
- Available with coordinating mosaic and decorative accents



POST-CONSUMER RECYCLED MATERIALS



PRE-CONSUMER RECYCLED MATERIALS



MADE IN THE U.S.A.

All or select items within this series meet the requirements for these qualifications. For more information visit daltile.com.



Floors Walls Countertops


F W C



CONTINENTAL SLATE™

COLORBODY™ PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC

COLORBODY™ PORCELAIN FLOOR TILE

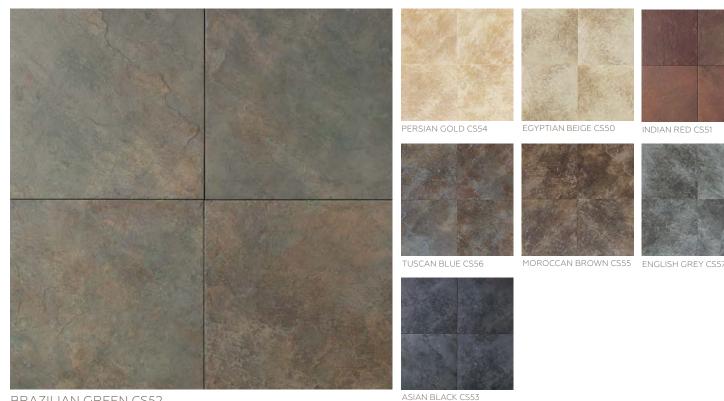

BRAZILIAN GREEN CS52

3 x 3 GLAZED CERAMIC MOSAIC



PERSIAN GOLD CS54



MOROCCAN BROWN CS55



EGYPTIAN BEIGE CS50



INDIAN RED CS51



BRAZILIAN GREEN CS52



ENGLISH GREY CS57



TUSCAN BLUE CS56



ASIAN BLACK CS53

DECORATIVE BORDER



CS70 4 x 12 DECORATIVE BORDER Egyptian Beige/Indian Red/ Brazilian Green/Asian Black



CS71 4 x 12 DECORATIVE BORDER Egyptian Beige/Indian Red/ Brazilian Green/Asian Black



CS74 4 x 12 DECORATIVE BORDER Persian Gold/Tuscan Blue/ Moroccan Brown



CS75 4 x 12 DECORATIVE BORDER Persian Gold/Tuscan Blue/ English Brown



CS72 4 x 12 DECORATIVE BORDER Egyptian Beige/Brazilian Green/ Asian Black

CONTINENTAL SLATE™

COLORBODY™ PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
18 x 18 Floor Tile	(17-13/16" x 17-13/16") (45.20 cm x 45.20 cm)	5/16"	18.00	8
12 x 12 Floor Tile	(11-13/16" x 11-13/16") (30.00 cm x 30.00 cm)	5/16"	15.00	15
6 x 6 Floor Tile	(5-13/16" x 5-13/16") (14.70 cm x 14.70 cm)	5/16"	11.00	44
4 x 12 Decorative Border	(4" × 11-13/16") (10.00 cm × 30.00 cm)	5/16"	N/A	10
3 x 3 Mosaic (Dot-mounted)	(1-15/16" x 9") (4.92 cm x 22.81 cm)	1/4"	24.00	12

APPLICATIONS

Target DCOF wet	Suitable
N/A	✓
≥ 0.42	✓
≥ 0.42	√ *
≥ 0.60	
≥ 0.65	
N/A	✓
N/A	✓
N/A	*
	DCOF wet N/A ≥ 0.42 ≥ 0.42 ≥ 0.60 ≥ 0.65 N/A N/A

A DCOF value of \geq 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest", visit daltile.com/DCOF.

APPLICATION NOTES:

Floor tile suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

Mosaic suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

* 6 x 6 floor and mosaic tile only

TRIM

Туре	Number	Size	Pieces/ Carton
Bullnose	P-43C9	3 x 12	30
Cove Base	S-36C9T	6 x 12	22
Cove Base Outcorner	SC-36C9T	1 x 6	15

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

Cove base and cove corner trim are suitable for non-freezing climates only.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 3/16"	

Mosaic: 1/8" Approximately



PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Mosaic Result
Water Absorption	C373	< 0.5%	< 3.0%
Breaking Strength	C648	> 275 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant
Abrasion Resistance	C1027	N/A	4

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



7834 C.F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.

