


DECORATIVE

VINTAGE HEX™ GLASS MOSAICS with REVEAL IMAGING®



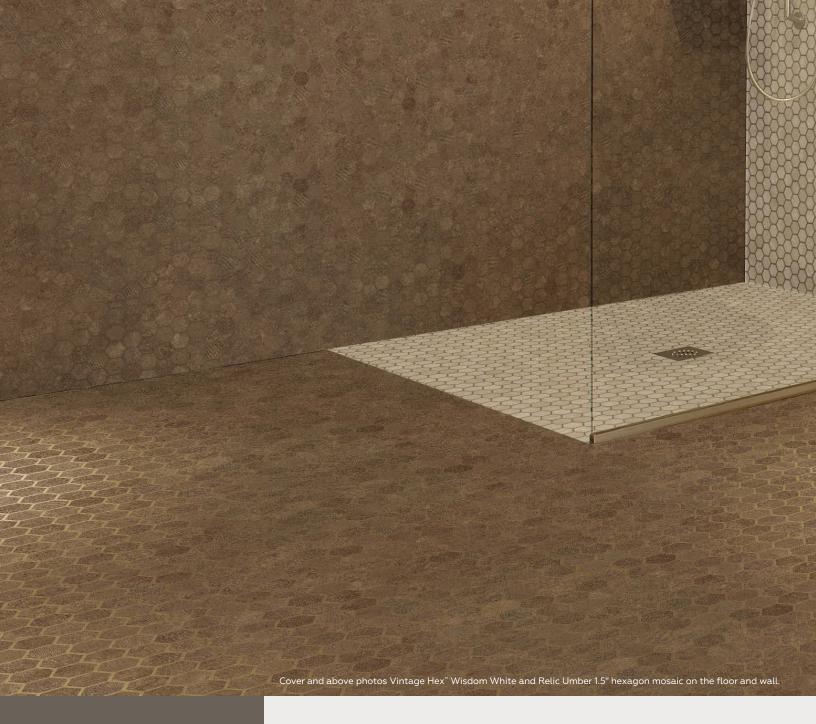

Classic Romance Enters The 21st Century

With a firm grasp on antique style, the Vintage Hex[™] collection captivates in a hexagon mosaic. A slight sheen finish modernizes the look, heightened by a limestone print that refreshes the beauty of natural stone. Textural depth heightens the collection's wide, assorted palette. Vintage Hex holds onto the romantic aesthetic of times past, yet reinvigorates the design for today's style sensibility.

VISUAL DEPTH

- Reveal Imaging® delivers the beauty of limestone
- Luminescent finish

• DESIGN VERSATILITY

- 1-1/2 inch hexagon mosaic featured in five colors
- Hexagon shape complements a wide variety of interior design genres
- Suitable for interior wet applications including shower floors



POST-CONSUMER RECYCLED MATERIALS



PRE-CONSUMER RECYCLED MATERIALS



REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information visit daltile.com.

USAGE

Floors Walls Countertops

W

F



1.5" HEXAGON MOSAIC



ANTIQUE BEIGE VH05



WISDOM WHITE VH06



ARTIFACT GRAY VH07



RELIC UMBER VH09



LEGACY SEPIA VH08

VINTAGE HEX™

GLASS MOSAICS with REVEAL IMAGING®

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
1.5" Hexagon Mosaic (Mesh-mounted on 12" x 12" Sheet)	(11-5/8" x 12-1/8" Sheet) (29.50 cm x 30.80 cm Sheet)	1/4"	11.34	14

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	✓

A DCOF value of \geq 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest", visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior wall applications in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	Random (V4)

PERFORMANCE CHARACTERISTICS

ASTM#	Result
C373	< 0.5%
C648	> 250 lbs
MOHS	4.0
C650	Resistant
C1027	N/A
	C373 C648 MOHS C650

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile. com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Since there are variations in all glass products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.2 standards.

Use of a white latex modified thin-set is recommended for installation





